

Complete spin polarization of electrons in semiconductor layers and quantum dots

V. V. Osipov^{1,2}, A. G. Petukhov³, and V. N. Smelyanskiy²

¹*New Physics Devices, LLC, 2041 Rosecrans Avenue, El Segundo, CA 90245*

²*NASA Ames Research Center, Mail Stop 269-3, Moffett Field, CA 94035*

³*Physics Department, South Dakota School of Mines and Technology, Rapid City, SD 57701*

(Dated: February 2, 2008)

We demonstrate that non-equilibrium electrons in thin nonmagnetic semiconductor layers or quantum dots can be fully spin polarized by means of simultaneous electrical spin injection and extraction. The complete spin polarization is achieved if the thin layers or quantum dots are placed between two ferromagnetic metal contacts with moderate spin injection coefficients and antiparallel magnetizations. The sign of the spin polarization is determined by the direction of the current. Applications of this effect in spintronics and quantum information processing are discussed.

PACS numbers: 72.25.Hg, 72.25.Mk

Spintronics is a new field of condensed matter physics based on manipulation of electron spins in solids [1, 2]. Injection of spin-polarized electrons into nonmagnetic semiconductors (NS) is of particular interest because of the relatively large spin-coherence lifetime, τ_s , in NS [1, 2] and promising applications for ultrafast, low-power spin devices [1, 2, 3, 4, 5] and for spin-based quantum information processing (QIP) [2, 6]. Both the characteristics of the spintronic devices and fidelities of various spin-based QIP schemes dramatically improve when spin polarization P_n of electrons in NS is high, i.e. when $P_n \rightarrow 100\%$. Thus the main challenge is to achieve high values of $P_n \sim 100\%$ in NS both at room and low temperatures. A simple intuition, supported by all previous theoretical works [7, 8, 9, 10, 11, 12], suggests that P_n under electrical spin injection cannot exceed either the polarization of a spin source or the spin injection coefficient of a ferromagnet-semiconductor contact. Since conventional ferromagnetic metals (FMs) routinely used in semiconductor technology have moderate spin polarizations $P_n \lesssim 40\%$, the main strategy to improve spin injection has been identified as development of magnetic semiconductors and half-metals with high bulk spin polarizations [1, 2]. Nonetheless, the greatest value of electron spin polarization in NS to date, $P_n \simeq 32\%$, has been observed in spin injection experiments with conventional FM (Fe) contacts [13].

One of the obstacles for the spin injection from FM into NS is a high and wide potential Schottky barrier that normally forms in NS near FM-NS interfaces [15]. The spin injection from FM into NS corresponds to a reverse current in the Schottky junction, which is usually negligible. Therefore, a thin heavily doped n^+ -S layer between FM and NS has been used to increase the tunneling transparency of the barrier [15] and the spin injection current [11, 12, 13]. Since the spin injection is a tunneling of spin polarized electrons from FM into NS, which is a symmetric process, the spin selection should also occur in forward-biased FM-S junctions when electrons are emitted from NS into FM [12]. In this case the

spins are extracted from NS into FM and the tunneling FM- n^+ -S contact works as a spin filter.

In this letter we consider a donor doped semiconductor (n -NS) layer placed between two spin selective contacts, for example, tunneling FM- n^+ -NS junctions, Fig.1. We show that the electron spin polarization in this n -NS layer can achieve 100% even when the spin injection coefficients of the contacts, γ_L and γ_R , are quite moderate. The only requirement is that $\gamma_{L(R)}$ should weakly depend on the current, J . Indeed, the currents of up-electrons with spin $\sigma = \uparrow$ through the contacts can be written as

$$J_{\uparrow}(0) = J(1 + \gamma_L)/2, \quad J_{\uparrow}(w) = J(1 + \gamma_R)/2, \quad (1)$$

where $J_{\uparrow}(0)$ and $J_{\uparrow}(w)$ are the currents in the n -NS layer at the boundaries with the right and left contacts $x = 0$ and $x = w$ (Fig.1). The continuity equation reads [7, 10, 11, 12]

$$dJ_{\uparrow}/dx = q\delta n_{\uparrow}/\tau_s, \quad (2)$$

where $\delta n_{\uparrow} = n_{\uparrow} - n_S/2$, n_S is the total electron density and $n_{\uparrow}$ is the density of up-electrons. Obviously $\delta n_{\uparrow}(x) \simeq \text{const}$ in the n -NS layer when its thickness $w \ll L_s$, where L_s is the spin diffusion length. Integrating Eq. (2) over x from 0 to w , we obtain $J_{\uparrow}(w) - J_{\uparrow}(0) = qw\delta n_{\uparrow}/\tau_s$, and using (1) and $\delta n_{\downarrow}(x) = -\delta n_{\uparrow}(x)$ we find the spin polarization in thin n -NS layer:

$$P_n(x) = (\delta n_{\uparrow} - \delta n_{\downarrow})/n_S \simeq (\gamma_R - \gamma_L)J/J_w \equiv \bar{P}_n, \quad (3)$$

where $J_w = qn_S w/\tau_s$. One can see from (3) that: $P_n = 0$ when $\gamma_R = \gamma_L$, since in this case the currents of up- and down electrons through the right and left contacts are the same: $J_{\uparrow}(0) = J_{\uparrow}(w)$. On the contrary when $\gamma_R \neq \gamma_L$ the value $|P_n| \rightarrow 1$ when $J \rightarrow J_t = J_w/(\gamma_R - \gamma_L)$. For example, if $\gamma_L < 0$ and $\gamma_R > 0$, i.e. magnetizations M_1 and M_2 in FM have opposite directions, Fig.1(a), $P_n = (|\gamma_R| + |\gamma_L|)J/J_w$, i.e. $P_n \rightarrow 1$ as $J \rightarrow J_t = J_w/(|\gamma_R| + |\gamma_L|)$. Thus, due to the difference of the currents of spin polarized electrons through the contacts, the spin density P_n in the n -NS layer increases with the current and can

reach 100% even at small spin injection coefficients. One can see from (3) that the inversion of the current results in the opposite sign of P_n . These findings are valid for both degenerate and nondegenerate semiconductors.

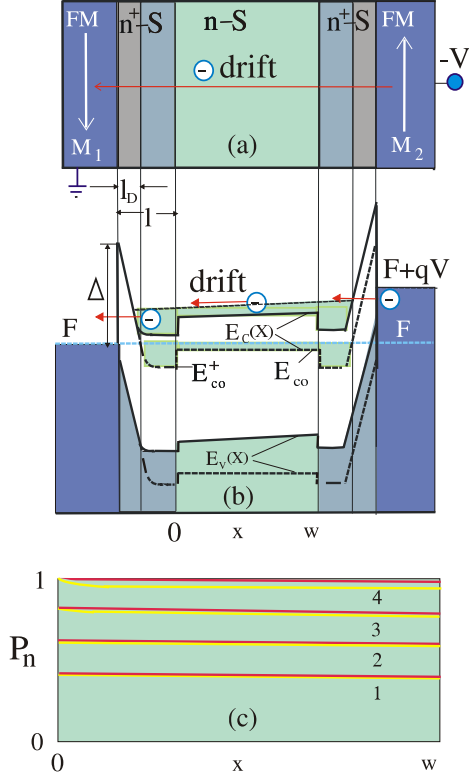


FIG. 1: (a) Ferromagnet-semiconductor FM- n^+ - n - n^+ -FM heterostructure containing a donor doped nonmagnetic semiconductor (n -NS) layer sandwiched between two ferromagnetic metals (FM) having opposite magnetizations, M_1 and M_2 , and two thin layers of a heavily doped degenerate semiconductor (n^+ -S layers) between the n -NS and FM layers. (b) Energy diagrams of the heterostructure in equilibrium (broken curves) and at bias voltage V (solid curves) in the case when the n^+ -S layers have a narrower bandgap than that of the n -S region and the n -S region is a degenerate semiconductor (for the nondegenerate n -S region $E_{co} > F$). Here F is the Fermi level in equilibrium, $E_c(x)$ is bottom of semiconductor conduction band, E_{co} and E_{co}^+ are the values of $E_c(x)$ in the n -S and n^+ -S layers, respectively; w and l thicknesses of the n -S and n^+ -S layers, respectively; Δ and l_D are the height and thickness of the Schottky barrier of the FM- n^+ -S junctions. (c) Spatial dependence of electron spin polarization, $P_n(x)$, in the nondegenerate (red curves) and degenerate semiconductor n -NS layer (yellow curves) for $\gamma_R = -\gamma_L = 0.3$ and $w = 0.1L_s$ at currents $J = 0.7J_w$ (curves 1), $J = J_w$ (curves 2), $J = 1.4J_w$ (curves 3), $J = J_t = 0.99J_w/(P_n^R - P_n^L) = 1.65J_w$ (curves 4). Red curves are calculated from Eq.(5) and yellow curves are obtained from numerical analysis of the diffusion-drift equation for $\delta n_1(x)$.

In nondegenerate NS the diffusion constants and mobilities of up- and down-electrons are the same, $D_\uparrow =$

$D_\downarrow = D$ and $\mu_\uparrow = \mu_\downarrow = \mu$, and the distribution of $\delta n_1(x)$ for any w reads [10, 11, 12]:

$$\delta n_1(x) = (n_S/2)(c_1 e^{-x/L_1} + c_2 e^{-(w-x)/L_2}), \quad (4)$$

where $L_{1,2} = L_s \left(\sqrt{1 + (J/2J_S)^2} - J/2J_S \right)$, $L_s = \sqrt{D\tau_s}$, $J_S = qn_S L_s/\tau_s$, and q is the elementary charge. Using the boundary conditions (1) we obtain:

$$P_n(x) = \frac{J}{J_S} \left[\frac{L_s(\gamma_R - \gamma_L e^{w/L_2})}{L_1 (e^{w/L_2} - e^{-w/L_1})} e^{-x/L_1} + \frac{L_s(\gamma_R - \gamma_L e^{-w/L_1})}{L_2 (e^{w/L_2} - e^{-w/L_1})} e^{x/L_2} \right] \quad (5)$$

It follows from (5) that $P_n(0)$ or $P_n(w)$ reaches 1 at $J = J_t(\gamma_L, \gamma_R, w)$. The spatial dependence of $P_n(x)$ is very weak for $w \ll L_s$ and $P_n(x) \simeq \bar{P}_n$ as in Eq. (3).

One can see from (3) and (5) that γ_R and γ_L determine a particular value of the threshold current, J_t , but it does not alter the main result: $|P_n| \rightarrow 1$ as $J \rightarrow J_t$. The only requirement is a relatively weak dependence of γ_R and γ_L on J . This condition can be fulfilled, for example, when thin, heavily-doped n^+ -S layers are formed between n -NS and FM regions, Fig. 1. The parameters of n^+ -S layers have to satisfy certain conditions [16]. In particular, the electron gas must be degenerate in a certain part of the n^+ -S layer and the transition between the n^+ -S and n -NS layers must be step-like. This situation is realized when the n^+ -S layers have energy bandgaps narrower than that of the n -S region, Fig. 1(b), or when an additional δ -doped acceptor layer is formed between the n^+ -S and n -NS regions. Due to a high density of electrons in the n^+ -S layer, γ of such FM- n^+ -S contacts weakly depends on J up to the currents significantly exceeding J_t [16]. Weak dependence of γ on J is also realized in FM-NS junctions with highly degenerate accumulation layers formed in NS near the FM-NS interface. This situation has been studied extensively in Refs. [7, 8, 9, 10] and has been realized experimentally in Fe-InAs junctions [14].

We note that γ [17] can strongly depend on J [11, 12] in FM-NS junctions when the n -NS region and thin (δ -doped) n^+ -layer are both nondegenerate semiconductors. In these FM-NS-FM junctions P_n attains the value $P_n = (\gamma_R - \gamma_L)/(1 - \gamma_R \gamma_L)$ for $J > J_S$ and $w \ll L_{1,2}$ [5]. One can see that $P_n = 0.6$ at $\gamma_R = -\gamma_L = 0.33$, i.e. even in this case P_n can exceed the spin injection coefficients of the FM-S junctions.

In degenerate semiconductors the diffusion constants of up- and down-electrons are different and depend on electron densities. As a result, $\delta n_1(x)$ is described by a diffusion-drift equation with a bi-spin diffusion constant $D(P_n)$ which goes to zero when $|P_n| \rightarrow 1$ [16]. Therefore, in degenerate NS, the spatial variation of $P_n(x)$ is sharper and its current dependence is stronger than those in nondegenerate NS [cf. yellow and red curves

in Fig. 1(c)]. For example, at $w = 0.1L_s$ and currents $J = J_t$ the polarization changes in the ranges $1 > P_n(x) > 0.984$ or $1 > P_n(x) > 0.954$ for nondegenerate NS or $1 > P_n(x) > 0.91$ or $1 > P_n(x) > 0.85$ for degenerate NS when $\gamma_R = -\gamma_L = 0.3$ or $\gamma_R = -\gamma_L = 0.1$, respectively.

At high currents when $J > J_t$ [see e.g. (3) and 5] the value $|P_n| = 2|\delta n_\downarrow|/n_S = |2n_\downarrow - n_S|/n_S$ is higher than 1, i.e. spin density either near $x = 0$ or near $x = w$ exceeds n_S . This means that the used condition of neutrality $n_\uparrow + n_\downarrow = n_S$, i.e. $\delta n_\uparrow(x) = -\delta n_\downarrow(x)$, is violated and a negative space charge accumulates near one of the boundaries. This charge will increase the voltage drop V_S across n -NS region. This conclusion follows from numerical analysis of our system of equations which includes: Eq. (2), $J = J_\uparrow(x) + J_\downarrow(x) = \text{const}$, $J_\sigma = q\mu n_\sigma E + qD_\sigma dn_\sigma/dx$, and the Poisson's equation, $\varepsilon\varepsilon_0 dE/dx = q(n_s - n_\uparrow - n_\downarrow)$.

The FM- n^+-n-n^+ -FM heterostructures under consideration are supersensitive spin valves. Indeed, as we noticed above [see (3) and (5)], $P_n \simeq 0$ and $\delta n_\downarrow(x) \simeq 0$ when $w < L_s$ and $\gamma_R = \gamma_L$, i.e. when the magnetizations M_1 and M_2 in the FM layers have the same direction. In this case, $V_S = V_{ohm} = Jw/q\mu n_S$ at any current. When $\gamma_R \neq \gamma_L$ the space charge arises in the n -S region at $J > J_t$ and V_{NS} exceeds V_{ohm} significantly. Thus, inversion of direction of M_1 or M_2 and also precession of electron spin in the n -S region have to change the voltage V_S to a much greater extent than in the structures considered in Refs. [5]. The use of the FM- n^+-n-n^+ -FM heterostructures in different spin-based devices [1, 2, 3, 4, 5] should result in dramatic improvement of their characteristics due to the high spin polarization of electrons in the n -NS layer.

A more complex FM- n^+-n-n^+ -FM heterostructure is shown in Fig. 2(a). High spin polarization of electrons arises in a thin n -S layer 1 grown on highly resistive wide-bandgap semiconductor layer 3 when the current flows between ferromagnetic regions FM₁ and FM₂. Such a heterostructure can be utilized modernize various spin-based nanodevices proposed in Refs. [5] such as ultra-speed magnetic sensors, transistors, square law detectors, and frequency multipliers. It can also be used for 100% spin polarization of electrons in quantum dots 5 localized in the layer 3 grown on a semiconductor substrate 4 having the same bandgap as the layer 1. This effect can be realized at very low temperatures even when the spin polarization inside the n -S layer 1 is less than 100%, e.g. $P_n \simeq 60\%-80\%$. Indeed, let us consider quantum dots (QD) (regions (5) in Fig. 2(a) with band offset $\Delta E_c' = E_{c5} - E_{c3} < 0$) that are placed inside of a two-dimensional potential barrier (semiconductor layer (3) with band offset $\Delta E_c = E_{c3} - E_{c1} > 0$). As we noted above, the spin polarization P_n and density of up-electrons, $n_\uparrow$, increase with current J between FM₁ and FM₂ contacts when $\gamma_L < 0$ and $\gamma_R > 0$. This means

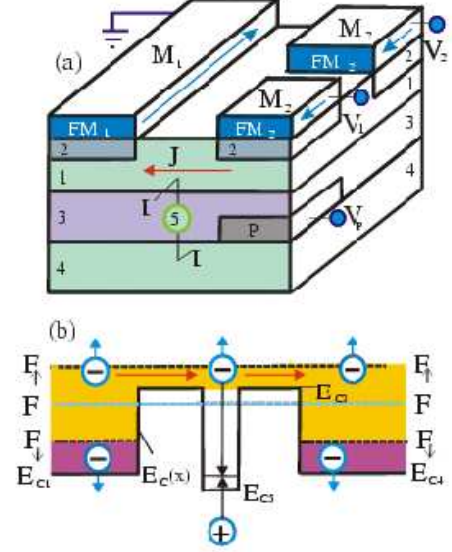


FIG. 2: Schematic drawing of a ferromagnet-semiconductor heterostructure (a). FM₁ and FM₂ are ferromagnetic layers with magnetization M_1 and M_2 (blue arrows); chlorine (1,4,5) and cerise (3) areas are donor doped semiconductor regions with different band-gap energy E_g and placement of bottom of conduction band E_c : $E_{c3} > E_{c1} = E_{c4} \gtrsim E_{c5}$, respectively; light blue areas (2) are heavily doped degenerate semiconductor (n^+ -S) regions with $E_{c2} < E_{c1}$; light grey area P is acceptor doped p -semiconductor region. (b). Energy diagrams of the heterostructure in sections I-I shown in Fig.2(a). F is the equilibrium Fermi level, $F_\uparrow$ and $F_\downarrow$ are quasi Fermi levels for up- and down-electrons, respectively.

that the quasi-Fermi level for the up-electrons $F_\uparrow$ increases and $F_\downarrow$ for down-electrons decreases with J . At a certain current $F_\uparrow$ can exceed ΔE_c and only the up-electrons will populate the layer 3 and will be captured by QDs. Thus, at very low temperatures the electron polarization in the QDs should be extremely close to 1, $1 - P_n \simeq \exp[-(E_{c3} - F_\uparrow)/T] \ll 1$. The spin polarization of electrons in QDs can be realized after their recombination with photogenerated holes or holes injected from p -region, shown in Fig.2a. This effect can be used for efficient polarization of nuclear spins in QDs. The sign of the spin polarization of electrons in the n -NS layer (1) and in QDs can be reversed by simple inversion of the current direction between FM₁ and FM₂ contacts, Fig. 2(a). Thus, the considered effects have a potential for changing the development strategy for various spin-based devices and QIP schemes.

This work is supported by NASA ITSR program (V. O and V. S.) and NSF (A. P.).

-
- [1] I. Zutic, J. Fabian, and S. Das Sarma, *Rev. Mod. Phys.* **76**, 323 (2004).
- [2] *Semiconductor Spintronics and Quantum Computation*, edited by D. D. Awschalom, D. Loss, and N. Samarth (Springer, Berlin, 2002).
- [3] S. Datta and B. Das, *Appl. Phys. Lett.* **56**, 665 (1990); S. Gardelis *et al.*, *Phys. Rev. B* **60**, 7764 (1999).
- [4] R. Sato and K. Mizushima, *Appl. Phys. Lett.* **79**, 1157 (2001); X. Jiang *et al.*, *Phys. Rev. Lett.* **90**, 256603 (2003).
- [5] V. V. Osipov and A. M. Bratkovsky, *Appl. Phys. Lett.* **84**, 2118 (2004); A. M. Bratkovsky and V. V. Osipov, *Phys. Rev. Lett.* **92**, 098302 (2004) and *Appl. Phys. A* **80**, 1 (2005).
- [6] M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum information* (Cambridge University Press, Cambridge, 2000).
- [7] A. G. Aronov and G. E. Pikus, *Fiz. Tekh. Poluprovodn.* **10**, 1177 (1976) [*Sov. Phys. Semicond.* **10**, 698 (1976)].
- [8] M. Johnson and R. H. Silsbee, *Phys. Rev. B* **35**, 4959 (1987); M. Johnson and J. Byers, *ibid.* **67**, 125112 (2003).
- [9] E. I. Rashba, *Phys. Rev. B* **62**, R16267 (2000).
- [10] Z. G. Yu and M. E. Flatte, *Phys. Rev. B* **66**, R201202 and 235302 (2002).
- [11] V. V. Osipov and A. M. Bratkovsky, *Phys. Rev. B* **70**, 205312 (2004).
- [12] A. M. Bratkovsky and V. V. Osipov, *J. Appl. Phys.* **96**, 4525-4529 (2004).
- [13] A. T. Hanbicki *et al.*, *Appl. Phys. Lett.* **80**, 1240 (2002); A. T. Hanbicki *et al.*, *ibid.* **82**, 4092 (2003).
- [14] H. Ohno *et al.*, *Jpn. J. Appl. Phys.* **42**, L1 (2003).
- [15] S. M. Sze, *Physics of Semiconductor Devices* (Wiley, New York, 1981).
- [16] V. V. Osipov, V. N. Smelaynskiy, and A. G. Petukhov, unpublished; V. V. Osipov and A. M. Bratkovsky, cond-mat/0504494 (2005).
- [17] Note that γ is denoted as P_J in Refs. [5, 11, 12] and is called current spin polarization of FM-NS contact.